UK ROADWORKS
GROUP LIMITED

COMMERCIAL SURFACING CAPABILITY

Surfacing for larger sites.

Commercial premises, industrial yards, car parks, estate roads and subcontract packages across mainland Scotland and the islands.

A family-run contractor with our own surfacing equipment and team. We review the existing construction, traffic, access and programme before agreeing a measured scope and written quotation.



FALKIRK | FACTORY & HGV LOADING



EDINBURGH | SPORTS-CENTRE CAR PARK

WORK PACKAGES

- Machine-laid and hand-laid tarmac / asphalt
- Hot tar & chip surface dressing
- Road planing, patch repairs and regulating
- Utility and trench reinstatement
- Farm, estate and private-road surfacing

PROJECT PREPARATION

- Site survey and agreed construction
- Own plant and surfacing team
- Risk assessments and method statements
- Qualification and insurance records on request
- Project references and photographs

SEND YOUR PACKAGE FOR PRICING

Email drawings, quantities, the specification, site postcode(s), work dates and tender deadline. Include access restrictions, responsibilities for associated work and any required supplier checks. Availability and suitability are confirmed for the proposed contract.

Company 16583465 | VAT 526 3436 94

Construction Industry Scheme (CIS) · UTR: 63467 11514

0330 223 8350 | info@ukroadworksgroupltd.co.uk
ukroadworksgroupltd.co.uk

Recorded project experience.

Our own photographs and project details. Each construction relates to the recorded site; a new project is assessed and specified separately.




FORFAR, ANGUS

Approximately 6,000 m²

Commercial machine-laid asphalt, with preparation and tack coat. Photograph taken during the surfacing operation.

View project photographs

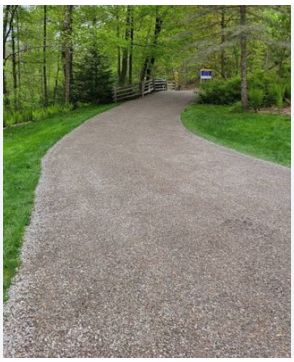

EDINBURGH ESTATE

4,000 m² surface dressing

General preparation, extra planings in low areas and two-layer polymer-modified bitumen and aggregate. Completed view.

View project photographs



GLASGOW AREA

Up to around 1,800 m² of repairs

Approximately 60 mm planing, bonding, replacement SMA and bitumen-sealed joints. Completed repair sections.

View project photographs



CALLANDER

Manor-house road construction

Excavation and widening, flat-top kerbs, MOT Type 1, base-course tarmac and an SMA surface course. Completed approach.

View project photographs